

## 锁紧板

用于带槽锁紧螺母 DIN 70852, 钢制

### 规格

#### 类型

- A 型: 斜齿式

#### 钢制 ST

普通饰面


### 信息

锁紧板 DIN 70952 可固定带槽锁紧螺母 DIN 70852 (参见页面) 它通过刚性连接来防止意外的松动或调整, 例如用于设定轴承轴向游隙的情形。

内侧凸耳通过嵌入螺栓的特制螺纹槽来定位锁紧板。调整好带槽锁紧螺母后, 需弯折匹配的锁紧凸耳卡入螺母槽内以锁定部件。因弯折会导致变形, 该锁定板建议仅使用一次。

### 技术信息

- ISO-基本公差 (参见页面 A21)

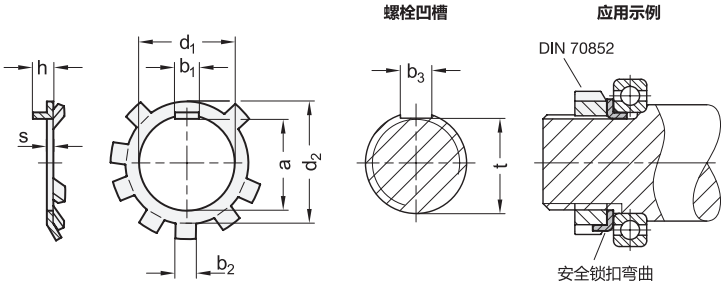

### DIN 70952

| 说明                | d <sub>1</sub> | a    | b <sub>1</sub> h11 | b <sub>2</sub> h11 | b <sub>3</sub> C11 | d <sub>2</sub> | h    | s    | t -0.1 | 用于带槽锁紧螺母<br>DIN 70852 | 📐  |
|-------------------|----------------|------|--------------------|--------------------|--------------------|----------------|------|------|--------|-----------------------|----|
| DIN 70952-10-A-ST | 10             | 8.9  | 4                  | 4                  | 4                  | 16             | 3.75 | 0.75 | 8.8    | M 10 x 1              | 1  |
| DIN 70952-12-A-ST | 12             | 10.9 | 4                  | 4                  | 4                  | 18             | 3.75 | 0.75 | 10.8   | M 12 x 1.5            | 2  |
| DIN 70952-14-A-ST | 14             | 12.9 | 5                  | 4                  | 5                  | 20             | 3.75 | 0.75 | 12.8   | M 14 x 1.5            | 2  |
| DIN 70952-16-A-ST | 16             | 14.9 | 5                  | 5                  | 5                  | 23             | 4    | 1    | 14.8   | M 16 x 1.5            | 2  |
| DIN 70952-18-A-ST | 18             | 16.9 | 5                  | 5                  | 5                  | 25             | 5    | 1    | 16.8   | M 18 x 1.5            | 2  |
| DIN 70952-20-A-ST | 20             | 18.9 | 5                  | 5                  | 5                  | 27             | 5    | 1    | 18.8   | M 20 x 1.5            | 3  |
| DIN 70952-22-A-ST | 22             | 20.9 | 6                  | 6                  | 6                  | 30             | 5    | 1    | 20.8   | M 22 x 1.5            | 3  |
| DIN 70952-24-A-ST | 24             | 22.9 | 6                  | 6                  | 6                  | 32             | 5    | 1    | 22.8   | M 24 x 1.5            | 3  |
| DIN 70952-26-A-ST | 26             | 24.9 | 6                  | 6                  | 6                  | 34             | 6    | 1    | 24.8   | M 26 x 1.5            | 4  |
| DIN 70952-28-A-ST | 28             | 26.9 | 7                  | 6                  | 7                  | 36             | 6    | 1    | 26.5   | M 28 x 1.5            | 5  |
| DIN 70952-30-A-ST | 30             | 28.9 | 7                  | 6                  | 7                  | 38             | 6.2  | 1.2  | 28.5   | M 30 x 1.5            | 6  |
| DIN 70952-32-A-ST | 32             | 30.9 | 7                  | 6                  | 7                  | 41             | 6.2  | 1.2  | 30.5   | M 32 x 1.5            | 6  |
| DIN 70952-35-A-ST | 35             | 33.9 | 7                  | 6                  | 7                  | 43             | 6.2  | 1.2  | 33.5   | M 35 x 1.5            | 6  |
| DIN 70952-38-A-ST | 38             | 36.6 | 8                  | 6                  | 8                  | 47             | 6.2  | 1.2  | 36.5   | M 38 x 1.5            | 7  |
| DIN 70952-40-A-ST | 40             | 38.6 | 8                  | 6                  | 8                  | 49             | 6.2  | 1.2  | 38.5   | M 40 x 1.5            | 7  |
| DIN 70952-42-A-ST | 42             | 40.6 | 8                  | 7                  | 8                  | 52             | 6.2  | 1.2  | 40.5   | M 42 x 1.5            | 8  |
| DIN 70952-45-A-ST | 45             | 43.6 | 8                  | 7                  | 8                  | 54             | 6.2  | 1.2  | 43.5   | M 45 x 1.5            | 8  |
| DIN 70952-48-A-ST | 48             | 46.7 | 8                  | 7                  | 8                  | 57             | 6.2  | 1.2  | 46.5   | M 48 x 1.5            | 10 |
| DIN 70952-50-A-ST | 50             | 48.7 | 8                  | 7                  | 8                  | 60             | 6.2  | 1.2  | 48.5   | M 50 x 1.5            | 11 |
| DIN 70952-52-A-ST | 52             | 50.7 | 8                  | 7                  | 8                  | 62             | 7.2  | 1.2  | 50.5   | M 52 x 1.5            | 12 |
| DIN 70952-55-A-ST | 55             | 53.7 | 10                 | 7                  | 10                 | 67             | 7.2  | 1.2  | 53.5   | M 55 x 1.5            | 13 |
| DIN 70952-60-A-ST | 60             | 58.7 | 10                 | 10                 | 10                 | 71             | 7.5  | 1.5  | 58     | M 60 x 1.5            | 16 |
| DIN 70952-65-A-ST | 65             | 63.7 | 10                 | 10                 | 10                 | 76             | 7.5  | 1.5  | 63     | M 65 x 1.5            | 17 |
| DIN 70952-70-A-ST | 70             | 68.7 | 10                 | 10                 | 10                 | 81             | 7.5  | 1.5  | 68     | M 70 x 1.5            | 18 |
| DIN 70952-80-A-ST | 80             | 78.2 | 10                 | 10                 | 10                 | 91             | 8.5  | 1.5  | 78     | M 80 x 1.5            | 25 |