

铰链

型材系统附件/ 压铸锌

规格


压铸锌
喷塑涂层
黑色, 纹理饰面
销
AISI 303 不锈钢

信息

GN 161型铰链设计用于市售铝型材的槽轨。
仅需三种不同类型的铰链便可调整与66种不同槽宽 'n' 配合。为了达到此目的, 应将定位零件安装在铰链侧面有特别标记的凹槽内。
矩形 (8×10mm) 定位零件以及两片铰链翼将防止轴线错位, 并可承受门的重量。
使用特殊T形螺母将铰链拧紧固定在型材上。

技术信息

- 铰链额定负载信息 (参见页 A40)
- 不锈钢特性 (参见页 A26)
- 铰链列表 (参见页 1362)

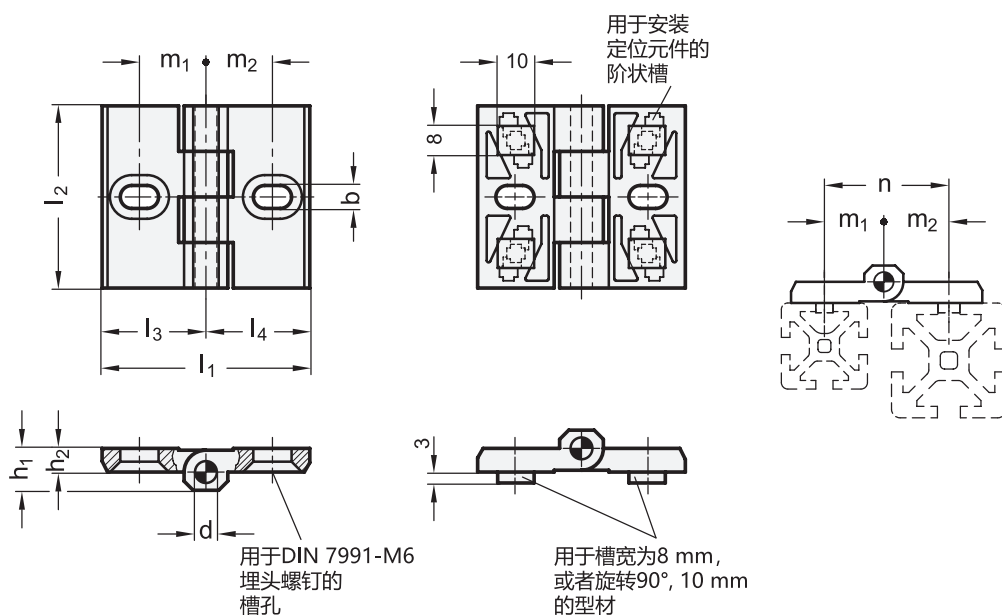


GN 161


说明	l1	b	d	h1	h2	h3	l2	l3	l4	△L
GN 161-57	57	6.3	6	12	6.5	13	50	28.5	28.5	107
GN 161-68	68	6.3	6	12	6.5	13	50	28.5	40	128
GN 161-80	80	6.3	6	12	6.5	13	50	40	40	144

GN 161-57 n 沟槽距离	m1	m2	GN 161-68 n 沟槽距离	m1	m2	GN 161-80 n 沟槽距离	m1	m2
33	16.5	16.5	37.5	16.5	21	42	21	21
34	16.5	17.5	38	16.5	21.5	42.5	21	21.5
35	16.5	18.5	39	16.5	22.5	43.5	21	22.5
35.5	16.5	19	40	16.5	23.5	44.5	21	23.5
36.5	16.5	20	42.5	16.5	26	47	21	26
35	17.5	17.5	44	16.5	27.5	48.5	21	27.5
36	17.5	18.5	47.5	16.5	31	52	21	31
36.5	17.5	19	38.5	17.5	21	43	21.5	21.5
37.5	17.5	20	39	17.5	21.5	44	21.5	22.5
37	18.5	18.5	40	17.5	22.5	45	21.5	23.5
37.5	18.5	19	41	17.5	23.5	47.5	21.5	26
38.5	18.5	20	43.5	17.5	26	49	21.5	27.5
38	19	19	45	17.5	27.5	52.5	21.5	31
39	19	20	48.5	17.5	31	45	22.5	22.5
40	20	20	39.5	18.5	21	46	22.5	23.5
-	-	-	40	18.5	21.5	48.5	22.5	26
-	-	-	41	18.5	22.5	50	22.5	27.5
-	-	-	42	18.5	23.5	-	22.5	31
-	-	-	44.5	18.5	26	47	23.5	23.5
-	-	-	46	18.5	27.5	49.5	23.5	26
-	-	-	49.5	18.5	31	51	23.5	27.5
-	-	-	40	19	21	54.5	23.5	31
-	-	-	40.5	19	21.5	52	26	26
-	-	-	41.5	19	22.5	53.5	26	27.5
-	-	-	42.5	19	23.5	57	26	31
-	-	-	45	19	26	55	27.5	27.5
-	-	-	46.5	19	27.5	58.5	27.5	31
-	-	-	50	19	31	62	31	31
-	-	-	41	20	21	-	-	-
-	-	-	41.5	20	21.5	-	-	-
-	-	-	43.5	20	23.5	-	-	-
-	-	-	46	20	26	-	-	-
-	-	-	47.5	20	27.5	-	-	-
-	-	-	51	20	31	-	-	-

旋转范围



安装说明



应用示例

