

定位元件

带外螺纹

规格

类型


- B型: 光滑接触面
- K型: 球形接触面
- R型: 锯齿接触面

钢制


- 表面硬化处理
- 发黑处理

信息

带有螺纹螺柱的定位元件GN 409.1适用于定位柱塞、止动块和止推底座。

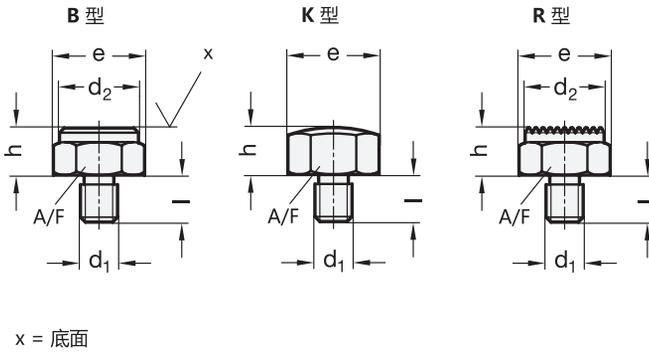

应用示例

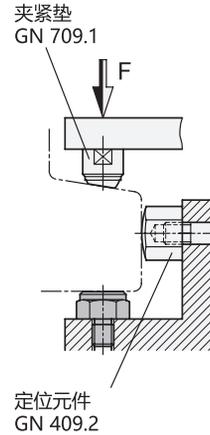

GN 409.1

型号	h ±0.01	h ±0.1	d1	d2	l	A/F	e	△
GN 409.1-10-M8-B	10	-	M 8	17	10	17	19.4	21
GN 409.1-10-M10-B	10	-	M 10	19	12	19	21.9	28
GN 409.1-10-M12-B	10	-	M 12	22	14	22	25.2	40
GN 409.1-15-M10-B	15	-	M 10	19	12	19	21.9	40
GN 409.1-15-M12-B	15	-	M 12	22	14	22	25.2	56
GN 409.1-15-M16-B	15	-	M 16	30	19	30	34.2	90
GN 409.1-20-M16-B	20	-	M 16	30	19	30	34.2	140
GN 409.1-10-M8-K	-	10	M 8	-	10	17	19.4	20
GN 409.1-10-M10-K	-	10	M 10	-	12	19	21.9	27
GN 409.1-10-M12-K	-	10	M 12	-	14	22	25.2	37
GN 409.1-15-M10-K	-	15	M 10	-	12	19	21.9	40
GN 409.1-15-M12-K	-	15	M 12	-	14	22	25.2	54
GN 409.1-15-M16-K	-	15	M 16	-	19	30	34.2	105
GN 409.1-20-M16-K	-	20	M 16	-	19	30	34.2	135
GN 409.1-10-M8-R	-	10	M 8	17	10	17	19.4	20
GN 409.1-10-M10-R	-	10	M 10	19	12	19	21.9	26
GN 409.1-10-M12-R	-	10	M 12	22	14	22	25.2	38
GN 409.1-15-M10-R	-	15	M 10	19	12	19	21.9	39
GN 409.1-15-M12-R	-	15	M 12	22	14	22	25.2	54
GN 409.1-15-M16-R	-	15	M 16	30	19	30	34.2	106
GN 409.1-20-M16-R	-	20	M 16	30	19	30	34.2	136