

不锈钢-Positioning bushings with ramping cone

用于分度销/凸轮分度销

规格


不锈钢 AISI 431
硬化处理

信息


不锈钢-Positioning bushings with ramping cone GN 412.5 are used in connection with bolts of indexing plungers. 螺纹适合安装块 GN 412.1 (参见页 814) 和 GN 612.1 (参见页 815).

技术信息

- 不锈钢特性 (参见页 A26)


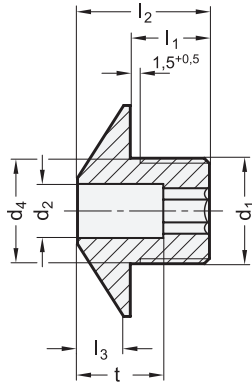


安装示例



应用示例

GN 412.5 带锥状斜面的定位衬套

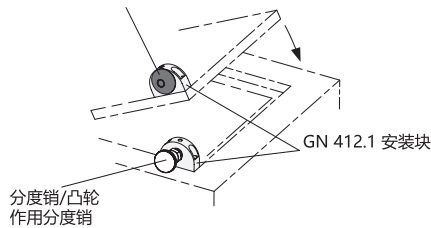

GN 412.5

不锈钢

说明	d1	d2 +0.1	d3	d4 -0.05	l1	l2	l3	A/F	t	△
GN 412.5-M12x1.5-B4.2	M 12 x 1.5	B 4.2	24	12	10	16	5	4	11	17
GN 412.5-M12x1.5-B5.2	M 12 x 1.5	B 5.2	24	12	10	16	5	4	11	16
GN 412.5-M12x1.5-B6.2	M 12 x 1.5	B 6.2	24	12	10	16	5	4	11	15
GN 412.5-M16x1.5-B8.2	M 16 x 1.5	B 8.2	32	16	12	20	7	6	13	37
GN 412.5-M16x1.5-B10.2	M 16 x 1.5	B 10.2	32	16	12	20	7	6	13	35
GN 412.5-M16x1.5-B12.2	M 16 x 1.5	B 12.2	32	16	12	20	7	6	13	33