

可调节紧固手柄

钢制，带内螺纹或外螺纹，按压解锁

规格

类型

- M型: 平直柄身
- N型: 倾角柄身

钢制

发黑处理

抗拉强度等级5.8

球形捏手 DIN 319 (钢制嵌件) (参见页 538)

热固性塑料


黑色, 光亮饰面

信息

GN 6337.3 可调节紧固手柄对于空间受到限制的位置或有特定手柄位置要求的应用场合是理想的选择。嵌件通过球孔内的可解除啮合的齿状件与毂相连接。


按下手柄杆, 脱开夹紧装置齿状件, 使其转动至理想的夹紧位置。释放手柄杆, 齿状件自动重新啮合。

如不可能进行 360°旋转, 嵌件能够借助滚花螺钉的槽轻轻拧入(手柄解除啮合状态后)

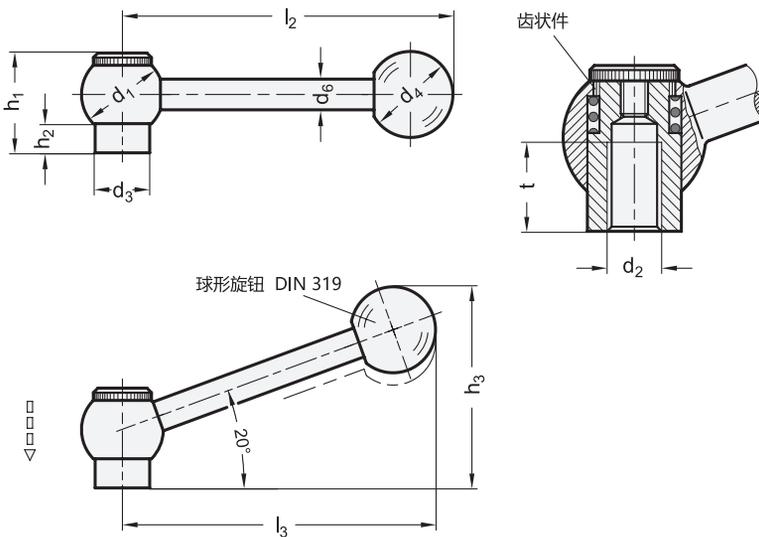

GN 6337.3-带螺纹嵌件

型号	d1	d2	d3	d4	d6	h1	h2	h3 ≈	l2	l3 ≈	t 最小	△
GN 6337.3-20-M6-M	20	M 6	13.5	20	8.5	25	8	-	74	-	12	61
GN 6337.3-20-M8-M	20	M 8	13.5	20	8.5	25	8	-	74	-	12	58
GN 6337.3-25-M8-M	25	M 8	16	25	11	29	8	-	93	-	15	114
GN 6337.3-25-M10-M	25	M 10	16	25	11	29	8	-	93	-	15	111
GN 6337.3-28-M10-M	28	M 10	19	30	13	33.5	10.5	-	116	-	18	189
GN 6337.3-28-M12-M	28	M 12	19	30	13	33.5	10.5	-	116	-	18	183
GN 6337.3-20-M6-N	20	M 6	13.5	20	8.5	25	8	46	-	70	12	61
GN 6337.3-20-M8-N	20	M 8	13.5	20	8.5	25	8	46	-	70	12	58
GN 6337.3-25-M8-N	25	M 8	16	25	11	29	8	58	-	87	15	114
GN 6337.3-25-M10-N	25	M 10	16	25	11	29	8	58	-	87	15	111
GN 6337.3-28-M10-N	28	M 10	19	30	13	33.5	10.5	70.5	-	109	18	189
GN 6337.3-28-M12-N	28	M 12	19	30	13	33.5	10.5	70.5	-	109	18	170

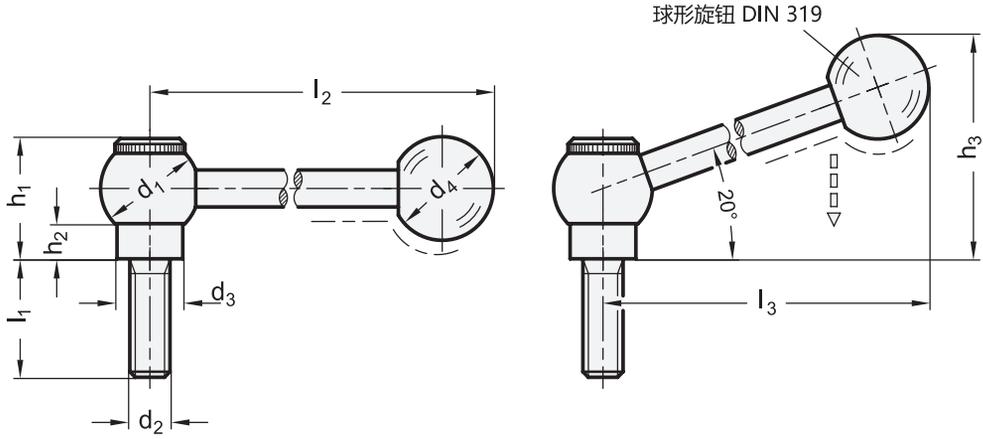

GN 6337.3-带螺杆

型号	d1	d2	l1	d3	d4	h1	h2	h3 ≈	l2	l3 ≈	△
GN 6337.3-20-M8-20-M	20	M8	20	13.5	20	25	8	-	74	-	69
GN 6337.3-20-M8-25-M	20	M8	25	13.5	20	25	8	-	74	-	70
GN 6337.3-20-M8-32-M	20	M8	32	13.5	20	25	8	-	74	-	73
GN 6337.3-20-M8-40-M	20	M8	40	13.5	20	25	8	-	74	-	75
GN 6337.3-20-M8-50-M	20	M8	50	13.5	20	25	8	-	74	-	78
GN 6337.3-20-M8-63-M	20	M8	63	13.5	20	25	8	-	74	-	82
GN 6337.3-25-M10-20-M	25	M10	20	16	25	29	8	-	93	-	129
GN 6337.3-25-M10-25-M	25	M10	25	16	25	29	8	-	93	-	132
GN 6337.3-25-M10-32-M	25	M10	32	16	25	29	8	-	93	-	136
GN 6337.3-25-M10-40-M	25	M10	40	16	25	29	8	-	93	-	138
GN 6337.3-25-M10-50-M	25	M10	50	16	25	29	8	-	93	-	144
GN 6337.3-25-M10-63-M	25	M10	63	16	25	29	8	-	93	-	151
GN 6337.3-28-M12-25-M	28	M12	25	19	30	33.5	10.5	-	116	-	217
GN 6337.3-28-M12-32-M	28	M12	32	19	30	33.5	10.5	-	116	-	222
GN 6337.3-28-M12-40-M	28	M12	40	19	30	33.5	10.5	-	116	-	228
GN 6337.3-28-M12-50-M	28	M12	50	19	30	33.5	10.5	-	116	-	235
GN 6337.3-28-M12-63-M	28	M12	63	19	30	33.5	10.5	-	116	-	243
GN 6337.3-28-M12-80-M	28	M12	80	19	30	33.5	10.5	-	116	-	255
GN 6337.3-20-M8-20-N	20	M8	20	13.5	20	25	8	46	-	70	69
GN 6337.3-20-M8-25-N	20	M8	25	13.5	20	25	8	46	-	70	70
GN 6337.3-20-M8-32-N	20	M8	32	13.5	20	25	8	46	-	70	73
GN 6337.3-20-M8-40-N	20	M8	40	13.5	20	25	8	46	-	70	75
GN 6337.3-20-M8-50-N	20	M8	50	13.5	20	25	8	46	-	70	78
GN 6337.3-20-M8-63-N	20	M8	63	13.5	20	25	8	46	-	70	82
GN 6337.3-25-M10-20-N	25	M10	20	16	25	29	8	58	-	87	129
GN 6337.3-25-M10-25-N	25	M10	25	16	25	29	8	58	-	87	132
GN 6337.3-25-M10-32-N	25	M10	32	16	25	29	8	58	-	87	136
GN 6337.3-25-M10-40-N	25	M10	40	16	25	29	8	58	-	87	138
GN 6337.3-25-M10-50-N	25	M10	50	16	25	29	8	58	-	87	144
GN 6337.3-25-M10-63-N	25	M10	63	16	25	29	8	58	-	87	151
GN 6337.3-28-M12-25-N	28	M12	25	19	30	33.5	10.5	70.5	-	109	217
GN 6337.3-28-M12-32-N	28	M12	32	19	30	33.5	10.5	70.5	-	109	222
GN 6337.3-28-M12-40-N	28	M12	40	19	30	33.5	10.5	70.5	-	109	228
GN 6337.3-28-M12-50-N	28	M12	50	19	30	33.5	10.5	70.5	-	109	235
GN 6337.3-28-M12-63-N	28	M12	63	19	30	33.5	10.5	70.5	-	109	243
GN 6337.3-28-M12-80-N	28	M12	80	19	30	33.5	10.5	70.5	-	109	255

