

柱头螺钉


带螺丝刀槽，高科技聚合物

材料

聚酰胺基 (PA) 高科技聚合物，本色。

特征及应用

该螺钉的形状和尺寸与 DIN 84 或 ISO 1207 中规定的形状和尺寸相似。它完全由耐腐蚀和耐化学品的绝缘材料制成。适用于工业、航空和电子等行业中的金属或木质结构，以及需要减轻重量的各种场合。该产品经过机械和尺寸性能测试。轻微的颜色变化是完全正常的，不会影响产品的质量。

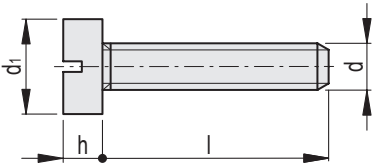

SRD.84

代码	说明	d	d ₁	l	h	最大螺纹拧紧扭矩 [Nm]	△
504701	SRD.84-M4X10-TP-N	M4	7	10	2.5	0.15	1
504702	SRD.84-M4X16-TP-N	M4	7	16	2.5	0.15	1
504703	SRD.84-M4X20-TP-N	M4	7	20	2.5	0.15	1
504704	SRD.84-M4X25-TP-N	M4	7	25	2.5	0.15	1
504711	SRD.84-M5X16-TP-N	M5	7	16	3.5	0.25	1
504712	SRD.84-M5X20-TP-N	M5	8.5	20	3.5	0.25	1
504713	SRD.84-M5X25-TP-N	M5	8.5	25	3.5	0.25	1
504714	SRD.84-M5X30-TP-N	M5	8.5	30	3.5	0.25	1
504715	SRD.84-M5X40-TP-N	M5	8.5	40	3.5	0.25	1.5
504716	SRD.84-M5X50-TP-N	M5	8.5	50	3.5	0.25	1.5
504721	SRD.84-M6X16-TP-N	M6	10	16	4	0.5	1
504722	SRD.84-M6X20-TP-N	M6	10	20	4	0.5	1
504723	SRD.84-M6X25-TP-N	M6	10	25	4	0.5	1.5
504724	SRD.84-M6X30-TP-N	M6	10	30	4	0.5	2
504725	SRD.84-M6X40-TP-N	M6	10	40	4	0.5	2.5
504726	SRD.84-M6X50-TP-N	M6	10	50	4	0.5	3
504731	SRD.84-M8X20-TP-N	M8	13	20	5	1.9	1.5
504732	SRD.84-M8X25-TP-N	M8	13	25	5	1.9	2.5
504733	SRD.84-M8X30-TP-N	M8	13	30	5	1.9	3
504734	SRD.84-M8X40-TP-N	M8	13	40	5	1.9	4
504735	SRD.84-M8X50-TP-N	M8	13	50	5	1.9	5
504741	SRD.84-M10X20-TP-N	M10	15	20	6	3	4
504742	SRD.84-M10X25-TP-N	M10	15	25	6	3	4.5
504743	SRD.84-M10X30-TP-N	M10	15	30	6	3	5
504744	SRD.84-M10X40-TP-N	M10	15	40	6	3	6.5
504745	SRD.84-M10X50-TP-N	M10	15	50	6	3	8
504746	SRD.84-M10X60-TP-N	M10	15	60	6	3	9.5
504751	SRD.84-M12X20-TP-N	M12	18	20	7	4.7	6
504752	SRD.84-M12X30-TP-N	M12	18	30	7	4.7	8.5
504753	SRD.84-M12X40-TP-N	M12	18	40	7	4.7	10
504754	SRD.84-M12X50-TP-N	M12	18	50	7	4.7	12.5
504755	SRD.84-M12X60-TP-N	M12	18	60	7	4.7	14
504756	SRD.84-M12X80-TP-N	M12	18	80	7	4.7	18.5