

缩孔套筒

适用于 TCC-VD 夹具, 可视检测高科技聚合物

材料

玻璃纤维增强聚酰胺基 (PA) 高科技聚合物, RAL 5005 蓝色, 亚光饰面。
由符合 FDA 标准的原材料 (FDA CFR.21 和 EU 10/2011) 生产。

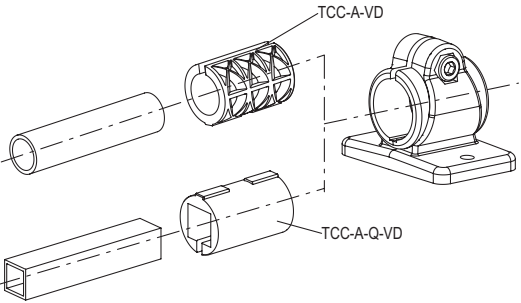
标准型号

TCC-A-VD: 用于直径为 “d1” ±0,2mm 的圆管。

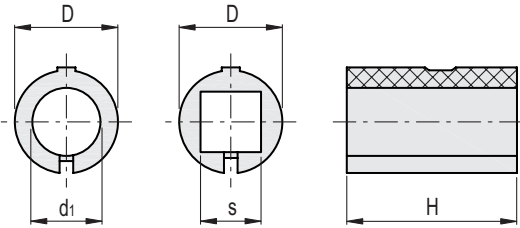
TCC-A-Q-VD: 用于方截面管 “s” ±0,2mm。

技术参数

表中所示阻力值是在环境温度下的实验室测试中测得的, 螺钉拧紧到 TCC-A-VD-18 的最大扭矩为 5 Nm, TCC-A-VD-30 为 12 Nm。



TCC-A-VD TCC-A-Q-VD







TCC-A-VD



代码	说明	D	H	d1	△
191101	TCC-A-18-12-VD	18	29	12	5
191102	TCC-A-18-14-VD	18	29	14	4
191103	TCC-A-18-15-VD	18	29	15	4
191104	TCC-A-18-16-VD	18	29	16	3
191201	TCC-A-30-20-VD	30	45	20	15
191202	TCC-A-30-25-VD	30	45	25	10





TCC-A-Q-VD

代码	说明	D	H	s	△
191107	TCC-AQ-18-10-VD	18	29	10	6
191108	TCC-AQ-18-12-VD	18	29	12	4
191207	TCC-AQ-30-20-VD	30	45	20	17

在同类型管夹头中插入减径衬套后，管件的抗拔力 (F1) 和抗旋转 力矩(M1)

	TCC-AB		TCC-CR		TCC-SL		TCC-TB		TCC-TS	
										
	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]
TCC-A-18-12	900	5	1250	5	900	5	900	5	900	5
TCC-A-18-14	1000	7	1650	10	1400	7	1050	8	1200	7
TCC-A-18-15	1000	7	1650	14	1400	10	1100	13	1200	11
TCC-A-18-16	1050	7	2000	14	1300	11	1200	14	1250	12
TCC-A-30-20	1000	8	1000	5	1000	6	1150	7	1000	6
TCC-A-30-25	1350	11	1300	7	1300	7	1600	7	1400	7
TCC-A-18-Q10	200		400		200		250		250	
TCC-A-18-Q12	400		800		400		500		500	
TCC-A-30-Q20	900		800		600		1150		1000	

	TCC-AP		TCC-TP		TCC-AP-AP		TCC-AP-PB	
								
	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]
TCC-A-30-20	1600	12	1600	12	1600	12	1600	12
TCC-A-30-25	2700	15	2700	15	2700	15	2700	15
TCC-A-30-Q20	1400		1400		1400		1400	

	TCC-AP-PBF		TCC-AP-TP		TCC-TP-PB		TCC-TP-PBF	
								
	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]	F1 [N]	M1 [Nm]
TCC-A-30-20	1600	12	1600	12	1600	12	1600	12
TCC-A-30-25	2700	15	2700	15	2700	15	2700	15
TCC-A-30-Q20	1400		1400		1400		1400	