

可调节手柄

压铸锌, 不锈钢嵌件, 带内螺纹或外螺纹

规格

手柄

压铸锌

喷塑涂层

黑色, RAL 9005, 纹理饰面 **SW**

橙色, RAL 2004, 纹理饰面 **OS**

嵌件/固定螺钉

AISI 303 不锈钢



信息

GN 101.1 可调节手柄对于空间受到限制的位置或有特定手柄位置要求的应用场合是理想的选择。中心嵌件通过可解除啮合的齿状件与毂相连接。

抬起手柄杆, 脱开夹紧装置齿状件, 使其转动至理想的夹紧位置。释放手柄杆, 齿状件自动重新啮合。

技术信息

- 不锈钢特性 (参见页 A26)

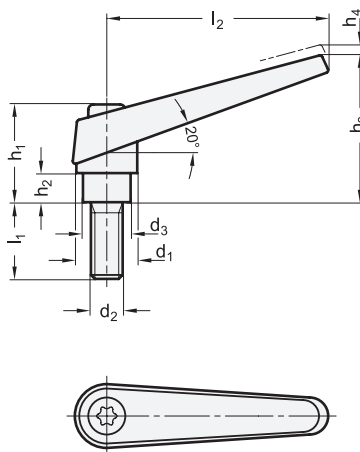

* 增加手柄柄身的颜色索引 (SW 或 OS)



GN 101.1-带内螺纹

不锈钢

型号	d1	d2	d3	h1	h2	h3 ≈	h4	l2	t 最小	△
GN 101.1-14-M5-*	14	M 5	10	25	4.5	35	3.5	45	9	36
GN 101.1-14-M6-*	14	M 6	10	25	4.5	35	3.5	45	9	36
GN 101.1-18-M6-*	18	M 6	13.5	31	6.5	45	4	62	11	71
GN 101.1-18-M8-*	18	M 8	13.5	31	6.5	45	4	62	11	60
GN 101.1-22-M8-*	22	M 8	16	36	8	52	4	74	14	116
GN 101.1-22-M10-*	22	M 10	16	36	8	52	4	74	14	116
GN 101.1-25-M10-*	25	M 10	19	43	11	63	4	89	17	174
GN 101.1-25-M12-*	25	M 12	19	43	11	63	4	89	17	168
GN 101.1-30-M12-*	30	M 12	23	50.5	12	76	5	108	22	290
GN 101.1-30-M16-*	30	M 16	23	50.5	12	76	5	108	22	273

* 增加手柄柄身的颜色索引 (SW 或 OS)



GN 101.1-带螺杆

不锈钢

型号	d1	d2	l1	d3	h1	h2	h3 ≈	h4	l2	
GN 101.1-14-M5-12-*	14	M 5	12	10	25	4.5	35	3.5	45	39
GN 101.1-14-M5-16-*	14	M 5	16	10	25	4.5	35	3.5	45	39
GN 101.1-14-M5-20-*	14	M 5	20	10	25	4.5	35	3.5	45	39
GN 101.1-14-M5-25-*	14	M 5	25	10	25	4.5	35	3.5	45	40
GN 101.1-14-M5-32-*	14	M 5	32	10	25	4.5	35	3.5	45	41
GN 101.1-14-M5-40-*	14	M 5	40	10	25	4.5	35	3.5	45	42
GN 101.1-14-M5-50-*	14	M 5	50	10	25	4.5	35	3.5	45	43
GN 101.1-14-M6-12-*	14	M 6	12	10	25	4.5	35	3.5	45	39
GN 101.1-14-M6-16-*	14	M 6	16	10	25	4.5	35	3.5	45	40
GN 101.1-14-M6-20-*	14	M 6	20	10	25	4.5	35	3.5	45	40
GN 101.1-14-M6-25-*	14	M 6	25	10	25	4.5	35	3.5	45	39
GN 101.1-14-M6-32-*	14	M 6	32	10	25	4.5	35	3.5	45	43
GN 101.1-14-M6-40-*	14	M 6	40	10	25	4.5	35	3.5	45	41
GN 101.1-14-M6-50-*	14	M 6	50	10	25	4.5	35	3.5	45	46
GN 101.1-18-M6-16-*	18	M 6	16	13.5	31	6.5	45	4	62	77
GN 101.1-18-M6-20-*	18	M 6	20	13.5	31	6.5	45	4	62	78
GN 101.1-18-M6-25-*	18	M 6	25	13.5	31	6.5	45	4	62	79
GN 101.1-18-M6-32-*	18	M 6	32	13.5	31	6.5	45	4	62	79
GN 101.1-18-M6-40-*	18	M 6	40	13.5	31	6.5	45	4	62	82
GN 101.1-18-M6-50-*	18	M 6	50	13.5	31	6.5	45	4	62	83
GN 101.1-18-M6-63-*	18	M 6	63	13.5	31	6.5	45	4	62	85
GN 101.1-18-M8-16-*	18	M 8	16	13.5	31	6.5	45	4	62	80
GN 101.1-18-M8-20-*	18	M 8	20	13.5	31	6.5	45	4	62	80
GN 101.1-18-M8-25-*	18	M 8	25	13.5	31	6.5	45	4	62	83
GN 101.1-18-M8-32-*	18	M 8	32	13.5	31	6.5	45	4	62	85
GN 101.1-18-M8-40-*	18	M 8	40	13.5	31	6.5	45	4	62	86
GN 101.1-18-M8-50-*	18	M 8	50	13.5	31	6.5	45	4	62	90
GN 101.1-18-M8-63-*	18	M 8	63	13.5	31	6.5	45	4	62	95
GN 101.1-22-M10-20-*	22	M 10	20	16	36	8	52	4	74	135
GN 101.1-22-M10-25-*	22	M 10	25	16	36	8	52	4	74	137
GN 101.1-22-M10-32-*	22	M 10	32	16	36	8	52	4	74	139
GN 101.1-22-M10-40-*	22	M 10	40	16	36	8	52	4	74	144
GN 101.1-22-M10-50-*	22	M 10	50	16	36	8	52	4	74	150
GN 101.1-22-M10-63-*	22	M 10	63	16	36	8	52	4	74	157
GN 101.1-22-M10-80-*	22	M 10	80	16	36	8	52	4	74	165
GN 101.1-25-M12-25-*	25	M 12	25	19	43	11	63	4	89	202
GN 101.1-25-M12-32-*	25	M 12	32	19	43	11	63	4	89	207
GN 101.1-25-M12-40-*	25	M 12	40	19	43	11	63	4	89	212
GN 101.1-25-M12-50-*	25	M 12	50	19	43	11	63	4	89	221
GN 101.1-25-M12-63-*	25	M 12	63	19	43	11	63	4	89	229
GN 101.1-25-M12-80-*	25	M 12	80	19	43	11	63	4	89	240
GN 101.1-30-M16-32-*	30	M 16	32	23	50.5	12	76	5	108	349
GN 101.1-30-M16-40-*	30	M 16	40	23	50.5	12	76	5	108	360
GN 101.1-30-M16-50-*	30	M 16	50	23	50.5	12	76	5	108	372
GN 101.1-30-M16-63-*	30	M 16	63	23	50.5	12	76	5	108	391
GN 101.1-30-M16-80-*	30	M 16	80	23	50.5	12	76	5	108	413



3
紧促手柄